

ProtectorGlaze

Providing temporary glass protection for the construction industry

PROTECTORGLAZE TIMBER - The Peelable coating solution formulated for use on glass, ppc aluminium, PVCu, and most non-porous painted timber surfaces that require temporary protection from other building trades.

PROTECTION IN 3 EASY STEPS

Apply by roller.


The coating is clear when dry allowing diffused light into the building.



Simply peel to remove at the end of the project revealing clean glass.



No bulk and Environmentally disposed.

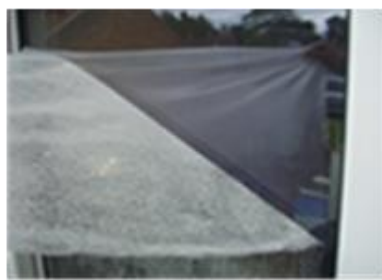

FINANCIAL ADVANTAGES

- Less labour time required to apply
- Glass can remain dusty when applying our product, unlike adhesive film that require the glass to be cleaned first
- No waste factor with material as opposed to film that requires cutting and shaping
- Leaves no residue that requires cleaning away
- Reduces the time needed for final clean

- **Protectorglaze does not fall off and need re-applying on site**

PRACTICAL ADVANTAGES

• UV stable	Up to 6 months.
• Leaves a clear Dry-film.	Optimises visual space allowing light penetration.
• Product Longevity at Correct Thickness	6 months externally and 12 months internally
• Non Hazardous	Water resistant when dry / Water cleanable when wet.
• Non-Flammable.	Resistant to Hot Works grinder ‘flecks’ and welding splatter, associated with curtain walling fabrication and installation.
• Less Waste Volume.	1sq m of dry film creates just 60mm diameter ball of waste.

For further information contact: Protectorglaze Ltd,

Highbury House,
15 The Woodlands,
Cold Meece,
Staffordshire,
ST15 0YA.

Tel: +44 (0)1785 761888

Email: sales@protectorglaze.com

Web: www.protectorglaze.com

